



Automatic Swing Gate

ES9600 Automatic Swing Gate



ES9600

The ES9600 Automatic Swing Gates comply with BS/EN 12453 (the current legislation ALL automated gates must comply with). We fit as standard a number of safety devices, including dual height photo cells and category 2/3 safety edges.

As standard, they are designed to be cast in to the ground when installed but also can be ordered to be bolt down if required.

The very neat precise housing design accommodates the control panel within the column. This gives a smooth finished appearance unlike other automated systems which often have an additional obtrusive housing.

The gates are controlled by a purpose made controller, single phase supply, via an integrated frequency converter controlled output to a 3 phase motor. This can be configured very easily for all the standard program modes including no passage time outs & free exit and entry loops to name a few.

The best feature of our gates is that they are fully assembled ready to be bolt down and as soon as they are commissioned they are fully compliant to all standards. This minimises disruption on site and leaves a beautifully finished product which will serve for many years.

ES9600 Automatic Gate Optional Extras


- Razor Wire Extensions
- Electric Fence
- Anti-Climb Spikes
- Traffic Lights
- Warning Siren
- Timber Infills
- Louvre Infills

Options for Access Control

- Keypad
- Proximity Cards
- Voice/Video Intercom Access
- Token Acceptors
- Remote Control Fobs
- Key Switches
- Loop Detectors



ES9600 Product Specification

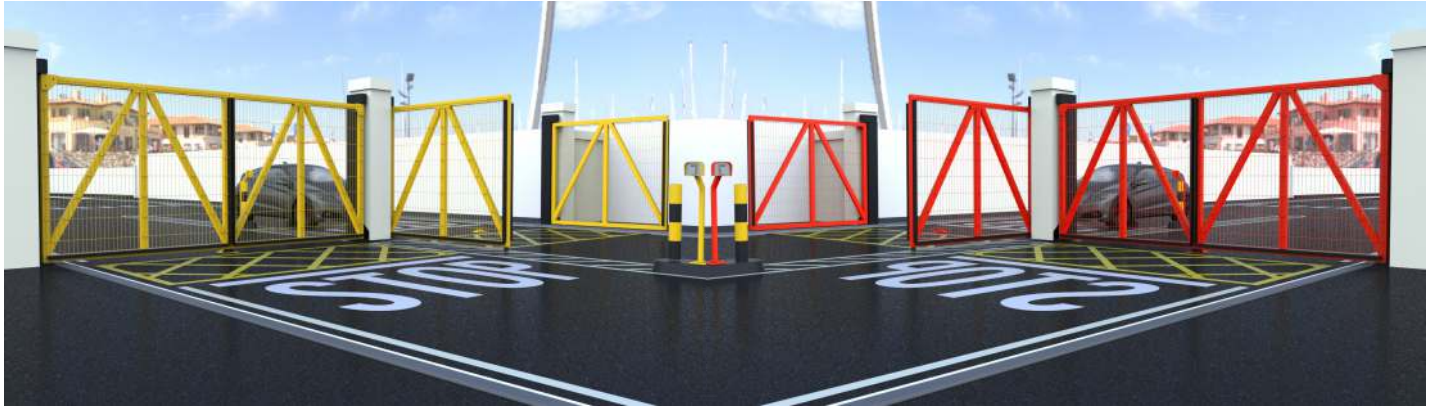

Specification	CE Approved BS/EN 12453
Maximum Span	8 Metres Drive-Through
Maximum Height	2.4 Metres
Finish	Powder Coated (Galvanised Optional)
Power Requirements	Single Phase 240V, 50Hz, 10 Amps
Drive Motor	3 Phase Motor & Wormed Gearbox
Duty Cycles	100% Continuous Duty Cycle Rating
Operation Time	4 - 10 Seconds (Dependant on Version)

Overall width size 8.6 metres

Maximum clear opening size 8 metres

